



TEST REPORT

Product Name: Type-C HUB
Trademark: N/A
Model Number: D Series
D05, D06, D07, D08, D09, D10, D11, D12, D13, D15, D16, D19, H09, G09
Prepared For: Dongguan Huachuang Electronic Co.,Ltd.
Address: Wanfeng Innovation Center, 1048th 358 Provincial Road, Shatou Area, Chang'an Towm, Dongguan City, Guangdong, China.
Manufacturer: Dongguan Huachuang Electronic Co.,Ltd.
Address: Wanfeng Innovation Center, 1048th 358 Provincial Road, Shatou Area, Chang'an Towm, Dongguan City, Guangdong, China.
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Sample Received Date: May 29, 2019
Sample tested Date: May 29, 2019 to Jun. 14, 2019
Issue Date: Jun. 14, 2019
Report No.: BCTC-FY190502882E
Test Standards 47 CFR FCC Part 15 Subpart B
Test Results PASS

Compiled by:

Icey Chen

Icey Chen

Reviewed by:

Zerol Yang

Eric Yang

Approved by:



Zerol Zhou/Manager

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.



TABLE OF CONTENT

	Page
Test Report Declaration	
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
5. TEST FACILITY AND TEST INSTRUMENT USED	7
6. RADIATION EMISSION TEST	8
6.1 Block Diagram Of Test Setup	8
6.2 Limit.....	8
6.3 Test Procedure	9
6.4 Test Result	10
7. EUT PHOTOGRAPHS	12
8. EUT TEST SETUP PHOTOGRAPHS	15

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
BCTC-FY190502882E	Jun. 14, 2019	Original	Valid



2. TEST SUMMARY

The Product has been tested according to the following specifications:

Standard	Test Item	Test result
FCC 15.107	Conducted Emission	N/A*
FCC 15.109	Radiated Emission	Pass

Remark *: The Product is powered by 5V DC.



3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Test item	Value (dB)
Conducted Emission (150kHz-30MHz)	3.20
Radiated Emission(30MHz~1GHz)	4.80
Radiated Emission(1GHz~6GHz)	4.90



4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Ratings: DC 5V from PC

Model difference: All models are identical except for the appearance color, the test model is D Series and the test results are applicable to other tests.

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	PC	Lenovo	ThinkPad S2	---	---	---

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Test Mode

Test item	Test Mode	Test Voltage
Radiated mission(30MHz-1GHz) Class B	Full Load	DC 5V from PC
All test mode were tested and passed, only Conducted Emissions, Radiated Emissions shows (*) is the worst case mode which were recorded in this report.		



5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.


5.2 Test Instrument Used

Radiated emissions Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 19, 2018	Jun. 18, 2021
Receiver	R&S	ESR	102075	Jun. 20, 2018	Jun.19, 2019
Amplifier	Schwarzbeck	BBV9718	9718-309	Jun. 20, 2018	Jun.19, 2019
Amplifier	Schwarzbeck	BBV9744	9744-0037	Jun. 20, 2018	Jun.19, 2019
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	VULB9163-942	Jun. 23, 2018	Jun.22, 2019
Horn Antenna	SCHWARZBEC K	BBHA9120D	1201	Jun. 23, 2018	Jun.22, 2021
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. RADIATION EMISSION TEST

6.1 Block Diagram Of Test Setup

30MHz ~ 1GHz:

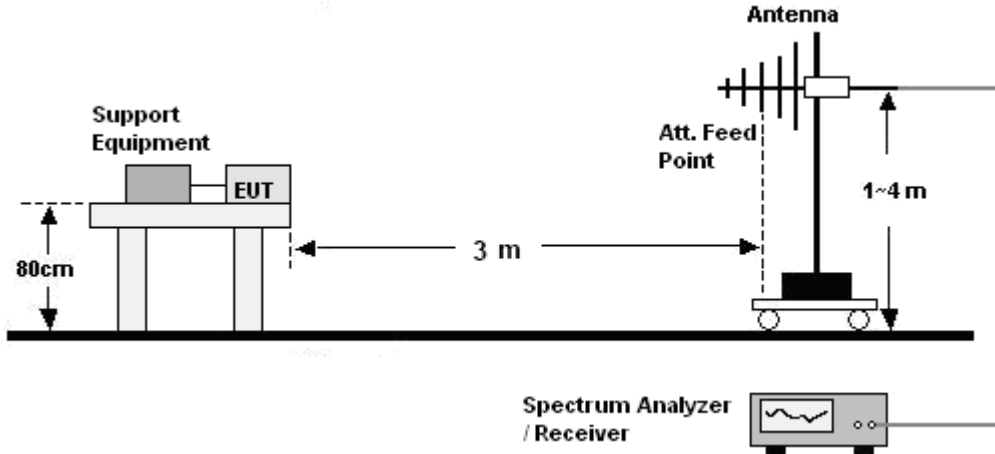

6.2 Limit

Limits for Class B devices

Frequency (MHz)	limits at 3m dB(μV/m)		
	QP Detector	PK Detector	AV Detector
30-88	40.0	--	--
88-216	43.5	--	--
216-960	46.0	--	--
960 to 1000	54.0	--	--
Above 1000	--	74.0	54.0

Note: The lower limit shall apply at the transition frequencies.



6.3 Test Procedure


30MHz ~ 1GHz:

- a. The Product was placed on the nonconductive turntable 0.8 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.



6.4 Test Result


Temperature:	23 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Horizontal
Test Voltage :	DC 5V from PC	Test Mode:	Full Load

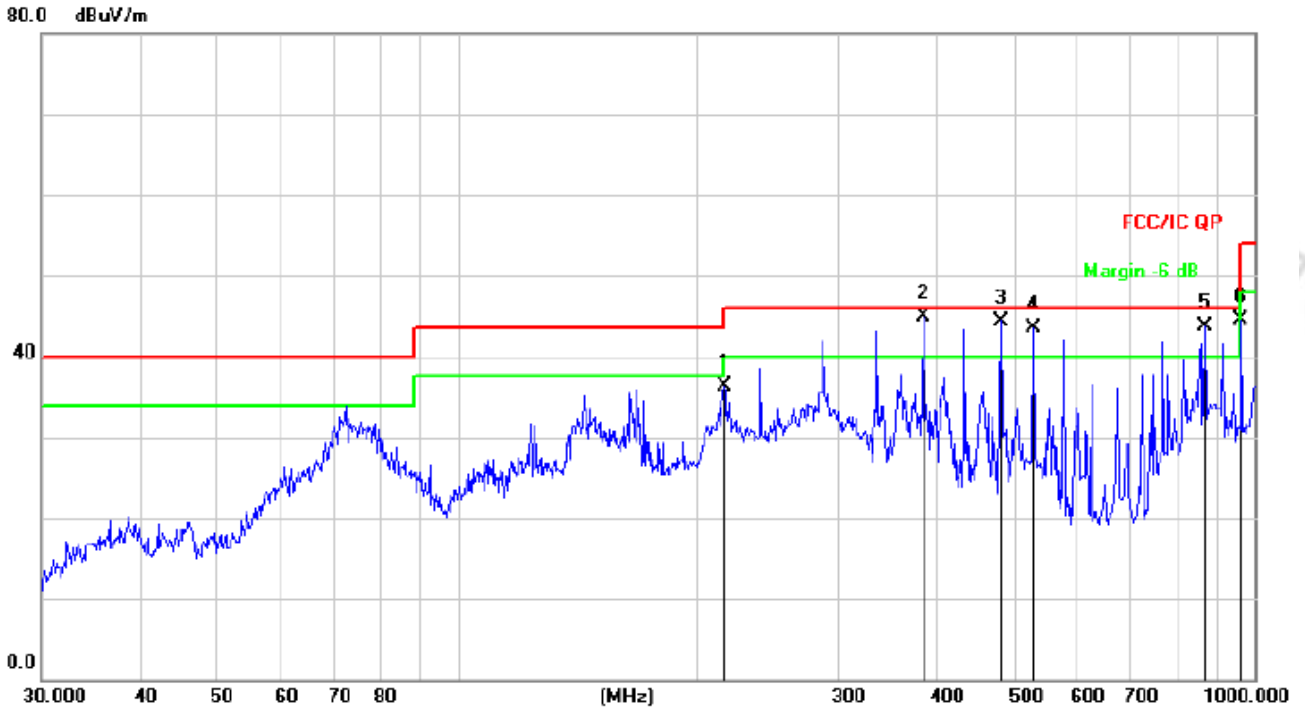

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		216.0240	52.23	-15.93	36.30	46.00	-9.70	QP			
2	*	383.9318	56.35	-11.46	44.89	46.00	-1.11	QP			
3		480.5276	53.74	-9.34	44.40	46.00	-1.60	QP			
4		528.2458	51.71	-8.23	43.48	46.00	-2.52	QP			
5		866.0878	45.95	-2.19	43.76	46.00	-2.24	QP			
6		962.1621	45.55	-1.04	44.51	54.00	-9.49	QP			



Temperature:	23 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Vertical
Test Voltage :	DC 5V from PC	Test Mode:	Full Load

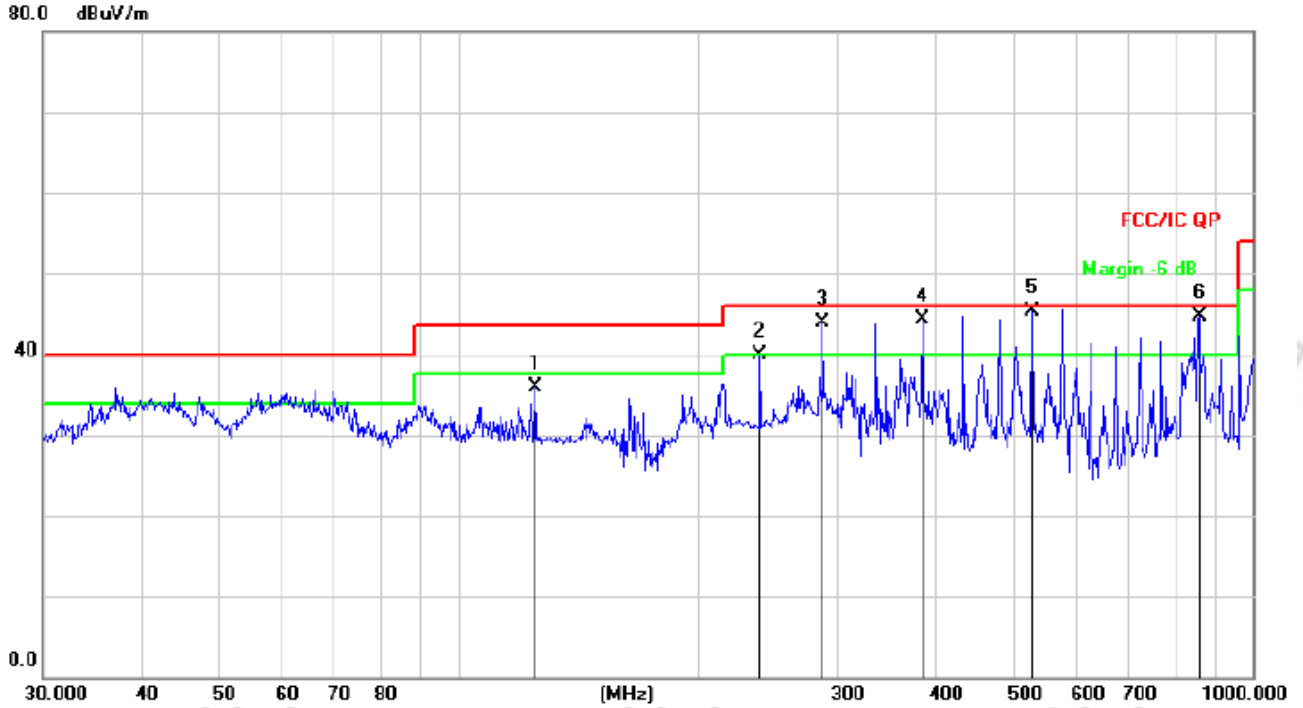

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		125.0066	53.89	-17.89	36.00	43.50	-7.50			QP
2		239.9874	55.37	-15.38	39.99	46.00	-6.01			QP
3	!	287.9904	57.80	-13.97	43.83	46.00	-2.17			QP
4	!	383.9318	55.79	-11.46	44.33	46.00	-1.67			QP
5	*	528.2458	53.51	-8.23	45.28	46.00	-0.72			QP
6	!	857.0247	47.12	-2.38	44.74	46.00	-1.26			QP

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.




7. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2

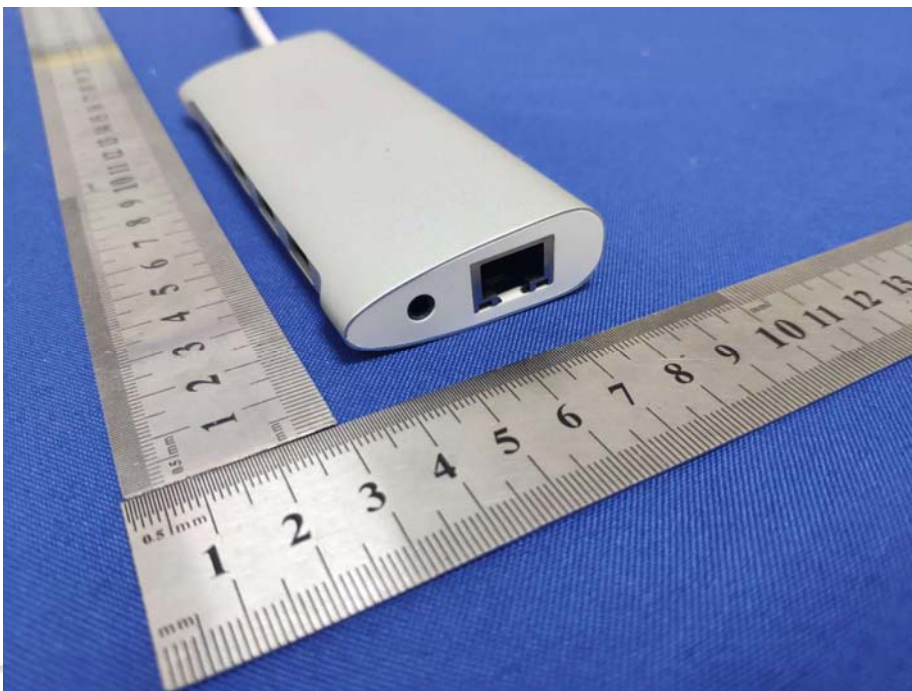




EUT Photo 3




EUT Photo 4



EUT Photo 5

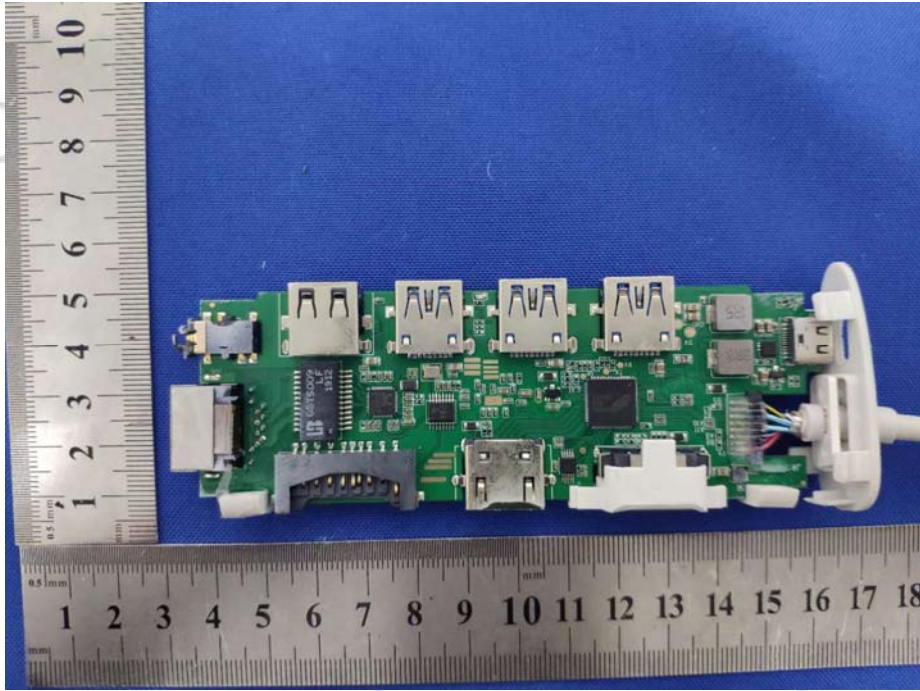


EUT Photo 6

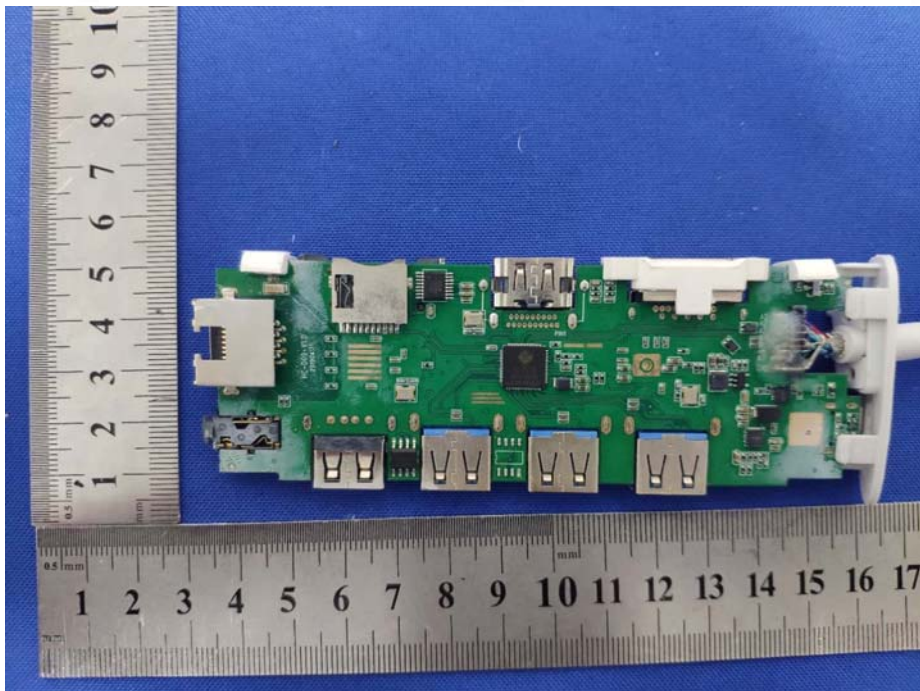



8. EUT TEST SETUP PHOTOGRAPHS

Radiated emission

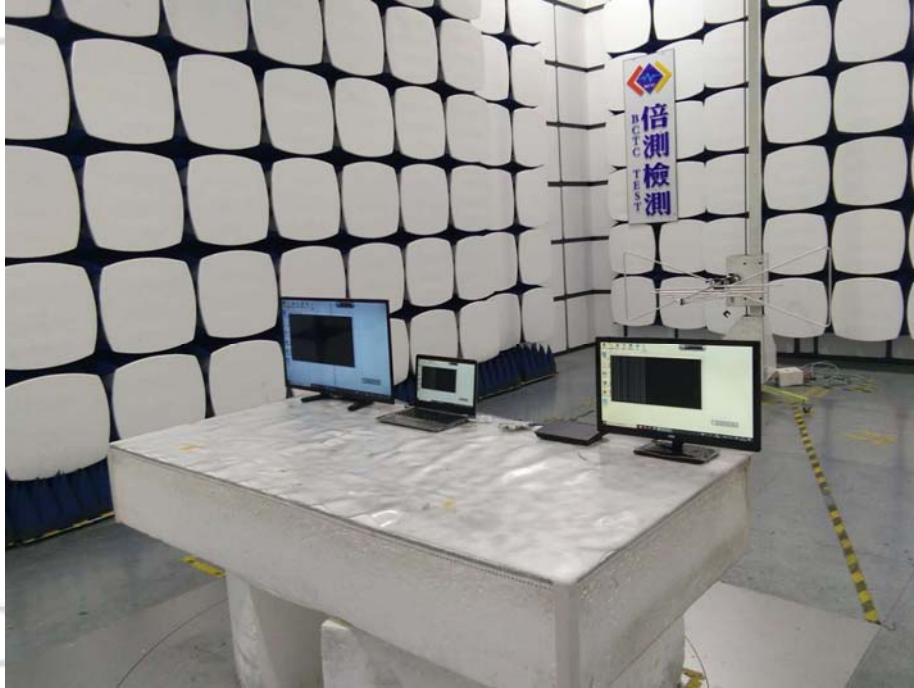

***** END OF REPORT *****